



SHIMANO®

1987 REPAIR MANUAL

Shimano American Corporation, One Shimano Dr.
Irvine, CA 92718

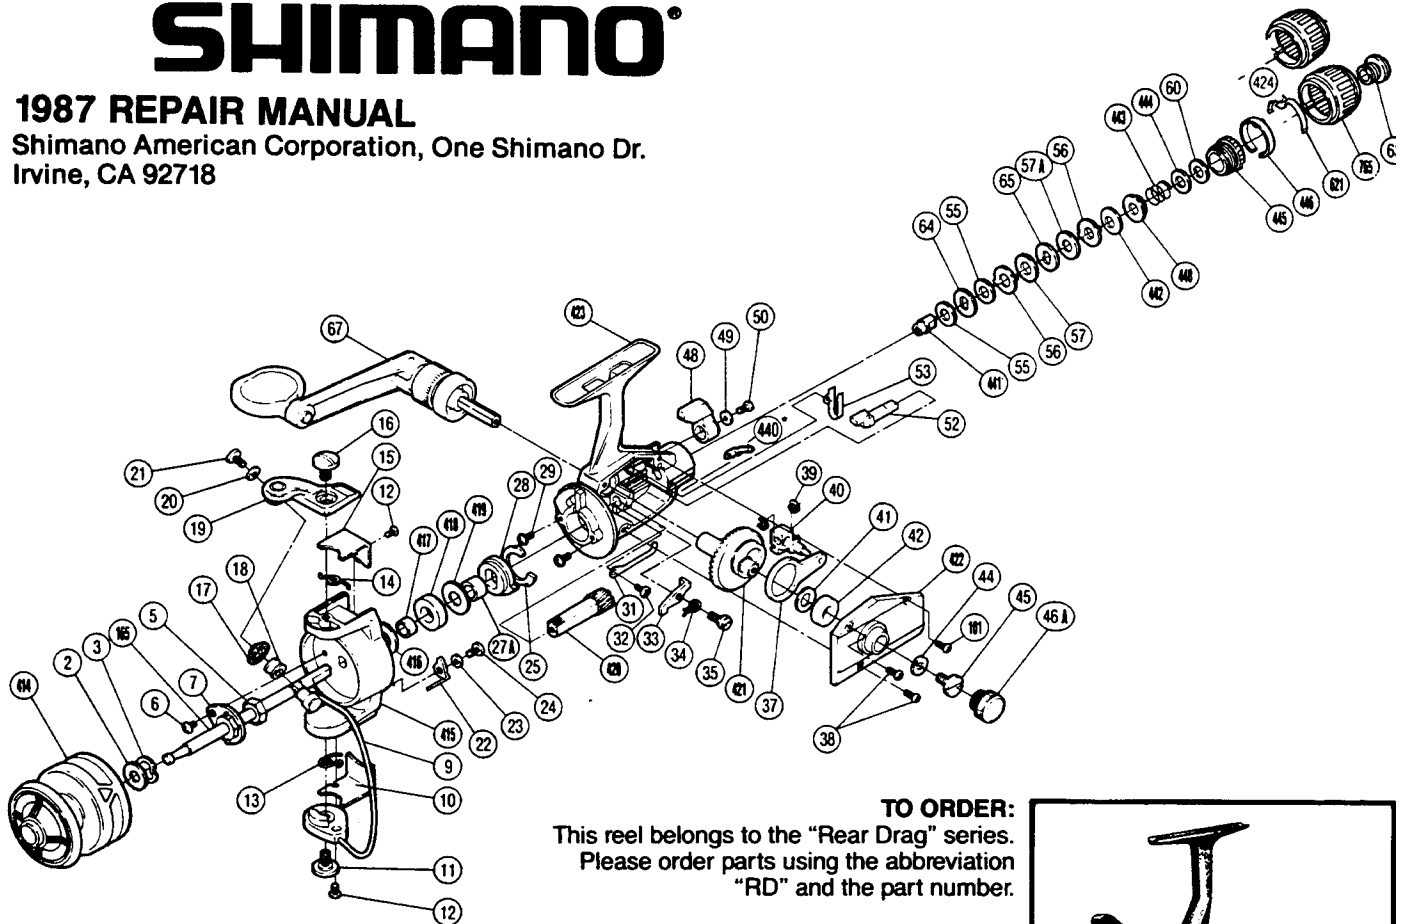

TO ORDER:
This reel belongs to the "Rear Drag" series.
Please order parts using the abbreviation
"RD" and the part number.

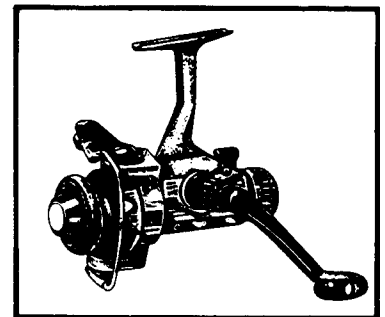

EXPLODED PARTS VIEW BX-10 PARTS LIST

PART# DESCRIPTION

- 2. Spool Spacer
- 3. Tension Spring
- 5. Rotor Nut
- 6. Nut Lock Screw
- 7. Rotor Nut Lock
- 9. Bail Wire
- 10. Trip Lever Cover
- 11. Bail Wire Screw
- 12. Cover Screw
- 13. Trip Lever Spring
- 14. Bail Spring
- 15. Bail Spring Cover
- 16. Trigger Screw
- 17. Line Guide Spacer
- 18. Roller Line Guide
- 19. QuickFire Trigger
- 20. Guide Screw Lock Washer
- 21. Bail Wire Screw
- 22. Trip Lever
- 23. Trip Lever Spacer
- 24. Trip Lever Screw
- 25. Anti Reverse Lock Out
- 27A. Bushing Spacer
- 28. Self Center Ratchet
- 29. Bearing Retainer Screw
- 31. Drag Click Spring

PART# DESCRIPTION

- 32. Multi Purpose Screw
- 33. Anti Reverse Dog
- 34. Anti Reverse Dog Spring
- 35. Anti Reverse Dog Screw
- 37. Oscillation Guide
- 38. Side Plate Screw
- 39. "C" Lock
- 40. Oscillation Guide Block
- 41. Thrust Washer
- 42. Drive Gear Bushing
- 44. Handle Screw Lock Washer
- 45. Handle Screw
- 46A. Dust Cap
- 48. Anti Reverse Lever
- 49. Lock Washer
- 50. Anti Reverse Lever Screw
- 52. Anti Reverse Shaft
- 53. Anti Reverse Shaft Spring
- 55. Drag Washer A
- 56. Keyed Washer
- 57. Drag Washer (Black)
- 57A. Drag Washer (White)
- 60. Friction Washer
- 63. Drag Screw
- 64. Ratchet Washer
- 65. D Washer

PART# DESCRIPTION

- 67. Handle
- 101. Side Plate Screw #2
- 165. Spindle
- 414. Spool
- 415. Rotor
- 416. Bushing Washer A
- 418. Pinion Gear Bushing
- 419. Bushing Washer B
- 420. Pinion Gear
- 421. Drive Gear
- 422. Side Plate
- 423. Housing
- 424. Drag Adjusting Knob (orig.)*
- 440. Drag Knob Click Spring*
- 441. Drag Shaft
- 442. Spring Washer
- 443. Drag Spring
- 444. Base Spring Washer
- 445. Spring Housing
- 446. Stop Ring
- 448. Lock Washer
- 449. Lock Spring
- 621. Drag Knob Click Spring ('85)
- 765. Drag Knob ('85)

*Not on Reels using 621